



FORM PTO-1390 (Modified) (REV 11-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER <b>221414US2PCT</b>	
<b>TRANSMITTAL LETTER TO THE UNITED STATES</b> <b>DESIGNATED/ELECTED OFFICE (DO/EO/US)</b> <b>CONCERNING A FILING UNDER 35 U.S.C. 371</b>				U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR) <b>10/089088</b>	
INTERNATIONAL APPLICATION NO. <b>PCT/EP00/10518</b>		INTERNATIONAL FILING DATE <b>25 October 2000</b>		PRIORITY DATE CLAIMED <b>29 October 1999 (earliest)</b>	
TITLE OF INVENTION <b>POSITIONING SYSTEM FOR RACING CARS</b>					
APPLICANT(S) FOR DO/EO/US <b>Robert ASAM</b>					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<ol style="list-style-type: none"> <li>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.</li> <li>4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).</li> <li>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371 (c) (2))           <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</li> <li>b. <input checked="" type="checkbox"/> has been communicated by the International Bureau.</li> <li>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</li> </ol> </li> <li>6. <input checked="" type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).           <ol style="list-style-type: none"> <li>a. <input checked="" type="checkbox"/> is attached hereto.</li> <li>b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</li> </ol> </li> <li>7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))           <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</li> <li>b. <input type="checkbox"/> have been communicated by the International Bureau.</li> <li>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li>d. <input checked="" type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li>8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</li> <li>9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).</li> <li>10. <input checked="" type="checkbox"/> An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).</li> <li>11. <input type="checkbox"/> A copy of the International Preliminary Examination Report (PCT/IPEA/409).</li> <li>12. <input checked="" type="checkbox"/> A copy of the International Search Report (PCT/ISA/210).</li> </ol>					
<b>Items 13 to 20 below concern document(s) or information included:</b>					
<ol style="list-style-type: none"> <li>13. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</li> <li>14. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</li> <li>15. <input type="checkbox"/> A <b>FIRST</b> preliminary amendment.</li> <li>16. <input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment.</li> <li>17. <input type="checkbox"/> A substitute specification.</li> <li>18. <input type="checkbox"/> A change of power of attorney and/or address letter.</li> <li>19. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.</li> <li>20. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).</li> <li>21. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).</li> <li>22. <input type="checkbox"/> Certificate of Mailing by Express Mail</li> <li>23. <input checked="" type="checkbox"/> Other items or information:           <div style="margin-left: 20px;"> <p>Notice of Priority/ Form PTO-1449</p> <p>Drawings (6 sheets)</p> <p>Article 34 Amendment (pages 2, 3, 3a, 9, 10, 10a, 17 and 17a)</p> </div> </li> </ol>					

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.101) <b>10/089088</b>		INTERNATIONAL APPLICATION NO. <b>PCT/EP00/10518</b>		ATTORNEY'S DOCKET NUMBER <b>221414US2PCT</b>	
24. The following fees are submitted: <b>BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5) ) :</b> <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... <b>\$1040.00</b> <input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... <b>\$890.00</b> <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$740.00</b> <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... <b>\$710.00</b> <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) ..... <b>\$100.00</b> <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				<b>CALCULATIONS PTO USE ONLY</b>	
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (c)). <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30				<b>\$890.00</b>	
				<b>\$130.00</b>	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	- 20 =	0	x \$18.00	<b>\$0.00</b>	
Independent claims	- 3 =	0	x \$84.00	<b>\$0.00</b>	
Multiple Dependent Claims (check if applicable).			<input type="checkbox"/>	<b>\$0.00</b>	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				<b>\$1,020.00</b>	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27). The fees indicated above are reduced by 1/2.				<b>\$0.00</b>	
<b>SUBTOTAL =</b>				<b>\$1,020.00</b>	
Processing fee of <b>\$130.00</b> for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30 +				<b>\$0.00</b>	
<b>TOTAL NATIONAL FEE =</b>				<b>\$1,020.00</b>	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).			<input type="checkbox"/>	<b>\$0.00</b>	
<b>TOTAL FEES ENCLOSED =</b>				<b>\$1,020.00</b>	
				<b>Amount to be: refunded</b>	<b>\$</b>
				<b>charged</b>	<b>\$</b>
a. <input checked="" type="checkbox"/> A check in the amount of <b>\$1,020.00</b> to cover the above fees is enclosed.					
b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.					
c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <b>15-0300</b> A duplicate copy of this sheet is enclosed.					
d. <input type="checkbox"/> Fees are to be charged to a credit card. <b>WARNING:</b> Information on this form may become public. <b>Credit card information should not be included on this form.</b> Provide credit card information and authorization on PTO-2038.					
<b>NOTE:</b> Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO:					
<div style="border: 1px solid black; padding: 10px; text-align: center;"> <b>22850</b> <b>Surinder Sachar</b> <b>Registration No. 34,423</b></div>					
<div style="text-align: right;"> _____ SIGNATURE <b>Marvin J. Spivak</b> _____ NAME <b>24,913</b> _____ REGISTRATION NUMBER <b>April 11 2002</b> _____ DATE</div>					

DescriptionPositioning System for Racing Cars

The present invention relates to a positioning system for racecars, in particular for use at Formula 1 races.

Sports racing with various types of racecars has been known and popular for centuries. Its popularity has led to the ongoing development and application of special vehicles for different types of races, track preparation measures, driving techniques, etc. New developments aimed at enhancing safety, providing more information to the public, increasing car speed, etc, are constantly being made.

US 5,731,788 discloses a system and a method for checking position and managing racing sailboat positions and speeds, which involve the strategic placement of GPS receivers and transmitters in a buoy and a committee boat that mark the starting line of the boat race, as well as radio and GPS receivers on the sailboat. GPS and radio units are placed in a start buoy and a start vessel, and another GPS and radio receiver unit receives GPS signals from positioning satellites and radio signals from the start buoy and the committee boat. The information received from the race boat is processed to find the relative and absolute positions and speeds, and the estimated arrival time using the intersection of the current sailboat course with the starting line for display in a user-friendly race management device.

US 3,714,649 describes an example of a vehicle monitoring system using a fully automatic system to monitor car racing or the like. Each vehicle carries a transponder, which registers its own passing of a position event, for example crossing the starting-finish line, entering or leaving the grandstand area, etc., and transmits a characteristic signal to a receiver on the track shoulder next to the position event in a time-division multiplex method with the transponders of all other vehicles. A main transmitter

- 2 -

transmits a time-division synchronization signal to all vehicle transponders and every transponder is embodied to send a position event signal only for a predetermined time period of the synchronization signal. The receivers on the track shoulder feed a central control unit, which is also synchronized with the main transmitter, and enters the appearance of each vehicle's position event in real time. A clock and a computer are provided for determining the order, lap speeds, etc. from the entered data. The system for recognizing a position event is based on the principle that the vehicle's inductance crosses a variable magnetic field whose polarity defines the position of the respective event.

US 4,949,067 also describes a car racing status warning system which comprises a transmitter operated by a section monitor or another racing official, and a sufficient number of receiver units to allow each racecar to have a receiver unit. The transmitter sends an encoded signal that can be received along the entire track, and corresponds to a red, yellow or green flag. The receiver units, which are self-contained and include a built-in power supply, receive and decode the signal and switch on green, yellow or red lights. The system offers the race participants an essentially instant notification of danger on the track.

The object of the invention is to provide a positioning system for racecars offering expanded functions, simplified use and enhanced safety over the previous prior art. Additional advantages of the invention will be described in greater detail below.

This object is accomplished by the features of Claim 1 and Claim 2. Preferred embodiments of the invention are defined in the dependent claims.

AMENDED PAGE

- 3 -

Basically, according to a first embodiment, the invention consists of a vehicle-information device that is housed in the racecar and comprises a positioning device for collecting and outputting positioning data, which can be used to identify the racecar's position, and a transmitter, which transmits the positioning data to a central unit. This guarantees a cost-effective and reliable identification of vehicle position. In particular, the above precludes any confusion between racecars, because each racecar ascertains and transmits its own positioning data. The transmitter can also be used to transmit additional data to the central unit.

An advantageous embodiment of the invention as a positioning system entails a plurality of such vehicle-information devices in conjunction with a calculation device, which uses stored racetrack data to calculate the position of the respective racecars on a racetrack from transmitted positioning data. By using a virtual image of the racetrack in the form of racetrack data, the respective positions of the racecars can be identified using the transmitted positioning data, without requiring that position-identifying devices be set up at all major points of the racetrack. The location at which a vehicle leaves the racetrack or has stopped can also be precisely ascertained without additional expense.

The track data can be reused if professionally stored; with appropriate measures, they can also be updated, wholly or in part, when the track is modified. It is also possible to transmit the track data to another positioning system.

Individuals of skill in the art are familiar with the fact that positioning data can be gathered in the vehicle in a wide variety of ways. For example, the vehicle can be equipped with a GPS (global positioning system, a global, satellite-supported navigation system) receiver or another satellite receiver, a direction finder or a gyro sensor. A

AMENDED PAGE

- 3 a -

redundant combination of such receivers or sensors can also be used. If desired, individual racecars can also be equipped with various positioning devices to obtain positioning data. In the use of direction finders, it is necessary to expand the positioning system with at least three direction-finding transmitters whose exact position on the racetrack is known. The position of the direction finder can be found by appropriately measuring the distance between the direction-finding transmitters and the respective direction finder.

AMENDED PAGE



As mentioned above, the transmitter provided in the vehicle-information device can be used to transmit vehicle-operating information, such as vehicle speed, engine RPM, or similar data. Such data are obtained using suitable sensors, or from the vehicle electronic system and can, for example, enable fast identification of stoppage or other danger situations for the racecar. In order to avoid misuse of the positioning and/or operating data, the data can be sent wholly or partially encrypted using known methods. Also relating to these preferred features of the invention, it is not necessary that the respective vehicle-information devices or racecars be equipped in the same way.

Preferably, the positioning system according to the invention comprises a central unit equipped with the aforementioned calculation device, a memory for storing racetrack data and one or more receivers for receiving the positioning and vehicle operating information transmitted by the respective vehicle-information devices. In these devices, the system components that do not have to be physically separate can be embodied as individual components, partial groups or as an integrated unit.

It is also advantageous if the central unit comprises a transmitter that can be used to transmit safety data, and one or more racecars participating in the positioning system have appropriate receivers and display devices to, if desired, receive and appropriately display the safety data. Thus, for example, if the positioning system according to the invention determined that a racecar had stopped, it could transmit a corresponding warning, analogous to the green, yellow and red flags used in Formula 1 racing, to signal the event to the other racecars participating in the positioning system.

In particular, the receivers installed in the racecars could also contain an identifying device, which would permit the control center to respond selectively to each receiver. In this way, it is possible to differentiate between the racecars participating in the positioning system based on danger status. For example, the vehicles that reach the danger zone after a long period of time could be signaled "green light," while the racecars that will soon pass the danger zone will be signaled "red light." All other racecars will be

signaled “yellow light.” Other differentiation methods known to the industry, such as time-division multiplexing or frequency-division multiplexing, can also be used to permit selective response to the various racecars.

To circumvent the need for all racecars to participate in the positioning system and to insure greater track safety, the customary section monitors can also take part in the positioning system in that one or more of them is or are equipped with receivers and display devices that receive and appropriately display the transmitted safety data. Here as well, the use of an identifying device or the like can make it possible to selectively address each section monitor. For reasons of security, the safety information can be sent wholly or partially encrypted using known methods.

Preferably, the positioning system according to the invention includes a display device that permits a visual display of the current positions of selected racecars on the racecourse using the track data and the calculated vehicle positions. This task can, if desired, be performed by the calculation device so that no additional hardware is necessary for the display device. For example, the calculation device could convert the obtained position information with the track data into a video signal, which could be sent to the TV stations broadcasting the race. The display device can also comprise one or more large screens or video screens that present such visual displays of selected vehicle positions to the spectators at the racetrack. The result is a system which, in addition to its safety advantages, also has the special advantage of informing the spectators – regardless of where they are sitting -- about the latest race information pertaining the entire course in real time, thus substantially enhancing the appeal of attending a race.

Likewise, the display device can include a data-processing device which, among other things, can enable a visual display of the current positions of selected racecars on the track on visual data-processing devices, connected, for example, via a fixed network or radio link to the data-processing device for transmitting data. The above could, for example, be used to create a virtual broadcast of the race via the Internet. Other race



information collected by the positioning system according to the invention, for example, the current placement or the current speed of selected racecars, could be called up and viewed on such a data-processing device integrated into the positioning system with suitable linkage to the visual data-processing devices. In this way, the data-processing device is integrated into the positioning system in such a manner that the relevant race data contained in the positioning system can be converted and processed by an operator feeding them into a data network, and that a desired audio and/or video representation of the racing events and/or the desired race data is possible on the respective visual data-processing device. The respective displays of a plurality of visual data-processing devices can be different. For example, a mobile telephone acting as a visual data-processing device could be used to show the respective placement and lead of selected racecars, while a computer linked to the data-processing device via Internet could present a virtual depiction of the racing events, e.g., the current positions of any selected racecars on the track, on the screen. Preferably, the desired display type and/or the information to be displayed will be selected by interactive entry between the user of the visual data-processing device and the data-processing device.

According to the invention, all or selected components of the positioning system are preferably provided in redundant fashion to ensure the function of the positioning system even in the event of the failure of one or more components. This is especially true for safety components, for example the positioning system's calculation device.

Alternately, the positioning system according to the invention can be realized in the sense of a second embodiment, in which instead of the positioning device and the transmitter, the respective vehicle-information devices have only one transmitter for transmitting directional signals. Using at least three spatially separate direction finders included in the system, positioning data can be obtained outside the vehicle, where they can be processed by the calculation device as described above. Because, for example, the direction finder can be connected to the central unit by cable, if desired, there is no need

for a receiver in the central unit. All other features of the invention are the same as in the first embodiment.

It is also possible that this second embodiment will only be used on selected racecars, and/or the two embodiments of the inventions will coexist among race drivers.

The invention is described in greater detail below by way of an exemplary embodiment illustrated in the following drawings. Shown are in:

- Fig. 1 a racetrack mapped out by track data according to a preferred embodiment of the invention;
- Fig. 2A a racetrack with a positioning system according to a preferred embodiment of the invention, in the first embodiment;
- Fig. 2B a racetrack with a positioning system according to a preferred embodiment of the invention, in the second embodiment;
- Fig. 3A a racetrack with a vehicle-information device according to a preferred embodiment of the invention, in the first embodiment;
- Fig. 3B a racetrack with a vehicle-information device according to a preferred embodiment of the invention in the second embodiment; and
- Fig. 3C a racecar with a vehicle-information device according to a second embodiment.

In Figure 1, track data map out a racetrack 2 according to an advantageous embodiment of a positioning system 1 according to the invention. The figure shows a

plurality of racecars 3A, 3B, 3C and 3X on racetrack 2, participating in the positioning system.

To be able to calculate the position of one or more of racecars 3 on racetrack 2, racetrack 2 is stored by positioning system 1 in the form of visual track data in such a way that it is possible to compare the track data with the positioning data received from the respective racecars 3. This comparison is made in a calculation device 9, for example a digital EDP system of positioning system 1. Accordingly, the track data can be preferably stored in a professional way in a storage device of calculation device 1. It is also possible to store the track data in a storage device (10) linked to calculation device 9, or to store the track data on a memory storage unit which is accordingly read by a reading device in place of the storage device (10).

According to the embodiment shown in Figure 1, the racetrack 2 is represented by ordered sequences of corner points 11, which are measured in a fixed coordinate system 12 and function as track data. Connecting the corner points 11 one after the other by straight-line pieces thus defines an interior or exterior boundary of track 2. Using this method, it is possible to represent any two-dimensional track topology. Also, individual track sections and the preset travel direction can be defined using corner points 11 and/or the corner-point sequences. Of course, it is possible to use other methods for mapping tracks known to individuals of skill in the art.

In the embodiment shown in Figure 1, the positions of the racecars 3 are ascertained using the coordinate system 12. Because, however, comparing coordinate data from different coordinate systems requires only an arithmetical conversion, the positioning data of each racecar 3 can also be identified using other coordinate systems. This could be the case, for example, if some racecars were tracked by GPS receiver, while the positioning information of other racecars 3D was generated via direction-finding receivers participating in a locally installed direction-finding system 23.

- 9 -

The figure assumes and indicates that the racecars 3 move counterclockwise on racetrack 2. If it is also assumed that racecar 3X is stopped, racecar 3A is located near the danger site. Racecar 3B is still at a safe distance from the immediate danger zone, while according to the drawing, vehicle 3C is not in immediate danger. The fact that the position of racecar 3 essentially has not changed indicates that it has stopped. The individual degree of danger for the remaining cars 3A, 3B, 3C can be determined by ascertaining the affected track section and the respective positions of the remaining racecars 3A, 3B, 3C participating in positioning system 1.

Figures 2A and 2B show various features of a positioning system 1 according to an advantageous exemplary embodiment of the invention according to the first and second /embodiment of the invention. They show a racetrack 2 containing a number of racecars 3 participating in positioning system 1, as well as two GPS satellites 24. Positioned along the racetrack 2 are a number of section monitors 22, grandstands 20 and a video screen 21, with the first and last being components of the exemplary positioning system 1. In the figures, positioning system 1 also includes a central unit 7, a transmitter/receiver system 8 and a calculation device 9. In Figure 2B, positioning system 1 has three direction finders 23 instead of the GPS satellites.

In Figure 2A, according to the first embodiment of the invention, racecar 3D utilizes a GPS receiver as a positioning device 5, the receiver receiving radio signals from GPS satellites 24. From these signals, the GPS receiver or another suitable positioning device in the racecar 3 obtains positioning data, which can be used to determine the current position of racecar 3. A transmitter 6 in racecar 3 transmits the obtained positioning data to a central unit 7, which is equipped with a reception device 8 associated with transmitter 6. Accordingly, the respective transmitters 6 of racecars 3 and central unit 7 of the preferred embodiment shown in Figure 2A form a star network. Together, positioning

AMENDED PAGE

- 10 -

device 5 and transmitter 6 in racecar 3 form a vehicle-information device 4.

In Figure 2B, according to the second embodiment of the invention, the position of vehicle 3D is determined by a direction-finding transmitter 6B that is installed in vehicle 3D and has at least three direction-finding receivers 23 near racetrack 2, and by the calculation device 9 comprising central unit 7. The direction-finding transmitter 6B transmits direction-finding signals, which are received by the direction-finding transmitters, processed and routed as positioning data to central unit 7, where they are used in calculation device 9 to determine the position of vehicle 3D. The positioning data can be transmitted in a known manner, for example via cable, from the direction-finding receivers 23 to central unit 7. The foregoing could eliminate the need for a receiver 8 in central unit 7. In the illustrated embodiment, receiver 8 is used to receive vehicle operating information and/or redundant positioning data from a data transmitter 6A located in the vehicle, which is preferably used to check the position or the operating condition of racecar 3D.

According to the invention, each racecar 3 participating in positioning system 1 has a vehicle-information device 4. These devices can, however, be designed according to different operating principles. The steps described above to obtain positioning data and to calculate the position of a racecar 3 are likewise performed, *mutatis mutandis*, for the respective vehicles.

In a calculation device 9 assigned to central unit 7, which comprises a memory 10, the track data stored in 10 are used to calculate the position of racecar 3 on racetrack 2. The position calculated in this manner provides information regarding the placement of

AMENDED PAGE

- 10 a -

racecar 3 among the racecars 3 participating in positioning system 1, and also about whether racecar 3 is stopped, has slowed down dangerously or has left racetrack 2.

Figures 2A and 2B show examples of a stopped vehicle 3X participating in the positioning system. Calculation device 9 uses the position information obtained therein to determine such a stopped state, or a corresponding device connected to calculation device 9, preferably located in the central unit 7, ascertains this fact. Subsequently, the

AMENDED PAGE



transmitter/receiver system 8 transmits an appropriate message to racecars 3 and/or to section monitors 22. For security reasons, transmitter/receiver system 8 preferably transmits the data according to the invention in encrypted form. Because the position of the stopped racecar 3X is known, it is possible, using an identifying device or another differentiator known to persons of skill in the art, to transmit a targeted message to the section monitor 22X closest to racecar 3X. It is accordingly possible to send a different message to racecar 3C than to racecars 3B or 3A. As mentioned above, in this way vehicle 3A could be signaled "red light" depending on the degree of danger, while racecar 3B could be signaled "yellow light," and the vehicles 3C "green light," which could be displayed in the respective vehicles 3. By the same token, the danger could be displayed on the track shoulder using appropriate display devices, for example by waving a flag or using a traffic light.

Figures 2A and 2B show a big screen video display 21, which makes possible a visual display of the current positions of selected racecars 3 on racetrack 2. The big screen video display 21 is supplied with signals generated in the calculation device 9 or in another display device using the positions calculated in calculation device 9 and the stored track data as described above. Such or similar signals can also be supplied to TV stations or to other communications services, for example to an Internet provider, to be broadcast. The display does not have to be limited to displaying vehicle positions; it can also include information regarding the respective vehicles 3 or other racing or advertising information.

The position information obtained by the positioning system 1 according to the invention relating to the participating racecars 3 can also be used to automatically direct or control television and surveillance cameras to one or more vehicles 3 along track 2. Also, the image captured by the camera that has the best view of a selected racecar 3 can be displayed automatically. A person of skill in the art can easily recognize several other, equally applicable variations of this principle.

The vehicles taking part in the race require minimal outfitting or refitting. Figures 3A, 3B and 3C show different embodiments of the two versions of a racecar 3 equipped according to the invention. According to the invention, the vehicles 3 are equipped with an antenna 30 and a vehicle-information device 4, which are installed professionally in or on the vehicle. The latter are indicated by dotted lines in Figure 3B.

Figure 3A shows a racecar with a minimally equipped vehicle-information device 4 according to the first embodiment of the invention, whereby vehicle-information device 4 comprises only the essential components. Accordingly, vehicle-information device 4 comprises only a positioning device 5 and a transmitter 6.

In the illustrated embodiment, a GPS receiver functions as a positioning device 5 and a data transmitter 6A fulfils the role of the transmitter 6. Using the antenna 30, GPS radio signals are transmitted from a GPS satellite 24 to the GPS receiver, where they are processed into positioning data. The positioning data are converted accordingly in data transmitter 6A and supplied to antenna 30, from which they are sent to a receiver 8 in central unit 7. It is known to a person of skill in the art that it is possible, if desired, to distribute the tasks among the components 5, 6 comprising vehicle-information device 4 in a different way. As mentioned above, other positioning devices 5 and transmitters 6 can also be used according to the invention.

Figure 3B shows a racecar with a minimally equipped vehicle-information device 4 according to the second embodiment of the invention, whereby the vehicle-information device 4 comprises only the essential components. Accordingly, the vehicle-information device 4 consists of only one direction-finding transmitter 6B, which transmits direction-finding signals via antenna 30 to corresponding direction-finding receivers 23, from where they are processed as described above.

According to the invention, the respective vehicle-information devices 4 of the vehicles 3 participating in the positioning system can be additionally connected to one or



more devices 33 – 39, or even include them; these devices transmit vehicle operating data or redundant positioning data directly, or via vehicle-information device 4, to transmitter 6 for transmitting these vehicle operating data and/or positioning data to central unit 7. A vehicle 3 equipped with many different accessory devices is shown in Figure 3C. According to the invention, these additional devices 33 – 39 can vary among the respective vehicles 3. The type of additional equipment of each vehicle 3 depends, among other things, on the weight of the devices 33 – 39 and their cost and space requirements.

The racecar 3 of the embodiment shown in Figure 3C corresponds to both the first and the second embodiments of the invention, because the illustrated vehicle-information device 4 is equipped with both a direction-finding transmitter 6 and a positioning device 5 and a transmitter 6. As a result, it is possible to redundantly track the vehicle using the positioning system according to the invention.

The shown vehicle-information device 4 optionally uses a GPS receiver as positioning device 5. Using antenna 30 or a separate antenna, GPS receiver 5 receives GPS signals 40 from GPS satellites 23, from which it obtains GPS positioning data that are then routed to data transmitter 6 to be transmitted to central unit 7. Although the thus obtained GPS data are known to be faulty, according to the invention no correction is absolutely required, because the error equally affects all vehicles 3 participating in the positioning system. If desired, a GPS receiver can be installed in central unit 7, whose GPS data will be compared with the fixed, known position of central unit 7 to generate a correction vector for the GPS information from the vehicles 3.

For redundant positioning of racecar 3, the illustrated vehicle-information device 4 also contains a direction-finding transmitter 6, which transmits direction signals to the direction-finding receivers 23 set up near racetrack 2 via antenna 30 or a separate antenna. As described above, that is where positioning data are obtained from the direction signals to be used in central unit 7. If desired, data transmitter 6 assumes the

function of direction-finding transmitter 6, or the two transmitters 6 are produced as an integral unit.

The shown racecar 3 comprises as additional equipment a tachometer 33, a gear-train sensor 34, a ground-motion sensor 35, a gyro sensor 38, an induction-loop sensor 37, a wheel-rotation sensor 38, and a position receiver 39. The gyro sensor 36 measures the acceleration of vehicle 3 using a piezoelectric component installed in the gyro sensor 36, and supplies positioning data based on acceleration measurements. The tachometer 33 and the wheel-rotation sensor 38 measure, using conventional methods, the rotation speed of the engine and the wheels and supply corresponding data, preferably in the form of pulse information or other digital data. The ground-motion sensor 35 uses infrared, ultrasound, or radar signals to determine the speed of vehicle 3 and to transmit this information in an appropriate data format. Gear-train sensor 34 determines the speed of the driving motor at the gears and transmits this information in data format. When the vehicle drives past induction loops embedded in the track in a conventional way, this can be read by the induction loop sensor 37 to obtain positioning information. Small-aperture position transmitters can also be placed along the track, which emit positioning signals 49 over a specific area. The positioning signals 49 are received by the position receiver 39 via antenna 30 or a separate antenna, which converts the positioning signals 49 into positioning data and to data transmitter 6, which routes them on to central unit 7.

According to the illustrated embodiment, the data from the respective sensors or devices 33 – 38 are routed as data signals 43 – 48 to data transmitter 6 to be routed to central unit 7. As indicated in Figure 3C, selected portions of the data signals 43 – 48 are, if desired, not routed to data transmitter 6 until they have been converted in vehicle information device 4. For security reasons, transmitter 6 preferably transmits the data according to the invention in encrypted form.

The illustrated vehicle-information device 4 also comprises a data receiver 31, which receives safety and/or data signals 42 via antenna 30 or a separate antenna, preferably

from central unit 7. The signals 42 are accordingly converted in data receiver 31 or in vehicle-information device 4 to generate, as discussed above, warning or other messages via a display device, for example, in the form of a cockpit display light 32 on the dashboard 32.

According to the invention, the various components of vehicle-information device 4, and sensors 33 – 38 are mounted to a suitable place on board vehicle 3, and appropriately connected or networked with each other via transmitter 6 to obtain the desired functioning capability. A person of skill in the art is aware that the described distribution of functions can, if desired, be structured differently among the components encompassed by the positioning system according to the invention.

In addition to determining RPM, acceleration values, direction of revolution, and speed of movement, the data obtained by the physical sensors 33 – 38 can also be compared to verify whether the obtained values interact correctly for proper locomotion of vehicle 3. For example, if the drive train rotates at an unusually higher rate than the wheel RPM, this can be diagnosed immediately as a differential defect, or, if the wheels revolve unusually faster than the recorded locomotion speed over the ground, this can be immediately diagnosed as wheel slippage. Together with the results of acceleration sensor 36 and, optionally, GPS receiver 5, the above can be used to verify a deviation from the allowable motion parameters, not only with absolute values, but also using redundant supplemental information.

The data obtained by the GPS positioning device 5 and the physical sensors can be used to test the correct or faulty motion of vehicle 3 on racetrack 2 in the direction of travel with a high degree of certainty. The data obtained by the described sensors and devices or similar ones can be used in central unit 7 to ascertain possible motor failure, the position, speed, or similar characteristic data of a racecar participating in the positioning system.

A person of skill in the art can use a limitless number of devices to obtain, process, transmit and/or evaluate the positioning and operating data participating in the present invention. For example, the data of the different racecars 3 can be distinguished by using a frequency-division or time-division multiplex signal or a suitable identifying device for the transmitted data.

Therefore, the embodiments and applications of the invention explained in the description serve merely as examples of what an individual of skill in the art understands or could understand in each context as being equivalent, and which, if desired, could be used instead of one of the listed examples. Such equivalents are therefore as much a part of the invention as the explicitly described, incomplete examples.

- 17 -

Claims

1. A positioning system (1) for racecars (3) on a racetrack (2) with  
a plurality of racecars (3), with each of the racecars (3) containing a vehicle-  
information device (4), which comprises  
a positioning device (5), which can be used to obtain and transmit positioning data  
relating to the position of the vehicle (3) at any time during the race, and at any  
location on the racetrack, and  
a transmitter (6), which transmits the positioning data  
and  
a central unit (7), equipped with  
at least one receiver (8) for receiving the transmitted positioning data,  
a memory (10) to store track data (11) of the racetrack (2), and  
a calculation device (9), which calculates the position of the  
racecars (3) on the racetrack (2) from the received positioning data of the respective  
racecars (3) and the stored track data (11).
2. A positioning system (1) for racecars (3) on a racetrack (2) with  
a first plurality of racecars (3), with each of the racecars (3) containing a vehicle-  
information device (4), which comprises a transmitter (6) that transmits direction-  
finding signals:  
at least three direction-finding receivers (23), which obtain and route positioning  
data from the transmitted direction-finding signals, which can be used to determine  
the position of the respective racecar (3) at any time during the race, and at any  
location on the racetrack, and  
a central unit (7), which is equipped with  
a memory (10) to store track data (11) of the racetrack (2),

AMENDED PAGE

a calculation device (9), which calculates the position of the racecars (3) on the racetrack (2) from the routed positioning data of the respective racecars (3) and from the stored track data (11).

AMENDED PAGE

3. The positioning system (1) according to Claim 2, with  
a second plurality of racecars (3), with each of the racecars (3) containing a vehicle-information device (4), which comprises:  
a positioning device (5) for obtaining and transmitting positioning data which can be used to determine the position of the vehicle (3), and  
a transmitter (6) which transmits positioning data, whereby  
the central unit (7) is equipped with at least one receiver (8) for receiving the transmitted positioning data, and  
the calculation device (9), which calculates the position of the racecars (3) of the second plurality on the racetrack (2) from the received positioning data from the respective racecars (3) and from the stored track data (11).
4. The positioning system (1) according to Claim 3, wherein the first and second plurality of racecars (3) wholly or partially correspond.
5. The positioning system (1) according to one of Claims 1, 3, or 4, wherein the positioning device (5) obtains the positioning data from a receiver of satellite-supported positioning data and/or a direction-finding receiver and/or a gyro sensor.
6. The positioning system (1) according to the one of the foregoing claims, wherein at least one of the racecars (3) contains at least one device (33 – 38) for obtaining vehicle operating data and/or positioning data, which are transmitted via the vehicle-information device (4) to the central unit (7).
7. The positioning system (1) according to the one of the foregoing claims, wherein the positioning and operating data can be wholly or partially encrypted when transmitted.

8. The positioning system (1) according to the one of the foregoing claims, wherein the central unit (7) comprises a transmitter (8), which transmits safety information and  
at least one of the racecars (3) comprises  
a receiver, which receives the safety information from the central unit (7), and  
a display which, if desired, displays a warning using the safety information.
9. The positioning system (1) according to the one of the foregoing claims, with section monitors (22), whereby at least one of the section monitors (22) is equipped with  
a receiver which receives safety data from the central unit, and  
a display which, if desired, displays a warning using the safety information.
10. The positioning system (1) according to the one of the foregoing claims, wherein, in the event of a stopped vehicle (3X), safety data are sent from the central unit (7), which enables displaying a warning in those vehicles (3A, 3B, 3C) and to section monitors (22X) located at a given section of the track.
11. The positioning system (1) according to the one of Claims 8 - 10, wherein the safety information can be determined from the calculated position and/or the operating data of at least one of the racecars (3).
12. The positioning system (1) according to the one of the foregoing claims, with a display device (9, 11), which permits a visual display of the current position of one or more racecars (3) on the racetrack (2) using the track data (11) and the vehicle positions.
13. The positioning system (1) according to the one of the foregoing claims, with a data-processing device, which edits selected racing information contained in the positioning system and feeds them to a network in such a way that a display of



these racing data is possible with visual data-processing devices networked via the data-processing device.

14. The positioning system (1) according to Claim 13, wherein the data-processing device and the visual data-processing devices are networked via the Internet.
15. The positioning system (1) according to Claim 13 or 14, wherein the data-processing device preferably permits an interactive selection of the respective racing information to be displayed and the respective type of display by the user of the respective visual data-processing devices, and performs appropriate processing.

## Abstract

A positioning system for racing cars is disclosed, which comprises a vehicle information device mounted in a racing car, with a positioning device for gathering and output of positional data, by means of which the position of the racing car can be fixed and a transmitter for sending the positional data to a control centre. A number of such vehicle information devices, operated in cooperation with a computational device, allow a useful execution of a positioning system, whereby said computational unit calculates the position of each car on the circuit from the transmitted positional data and stored race track data. The position of each of the race cars can be fixed using the virtual map of the race track course, in the form of the race track data and the transmitted positional data, without the need to establish positioning devices at essentially all the points around the race track. A vehicle coming to rest or leaving the race track can also be determined and precisely located without additional requirements.

WO 01/33530


OBLON ET AL (703) 413-3000

PCT/EP00/10518


DOCKET # 22141405 SHEET 1 OF 6

1/6

Fig. 1

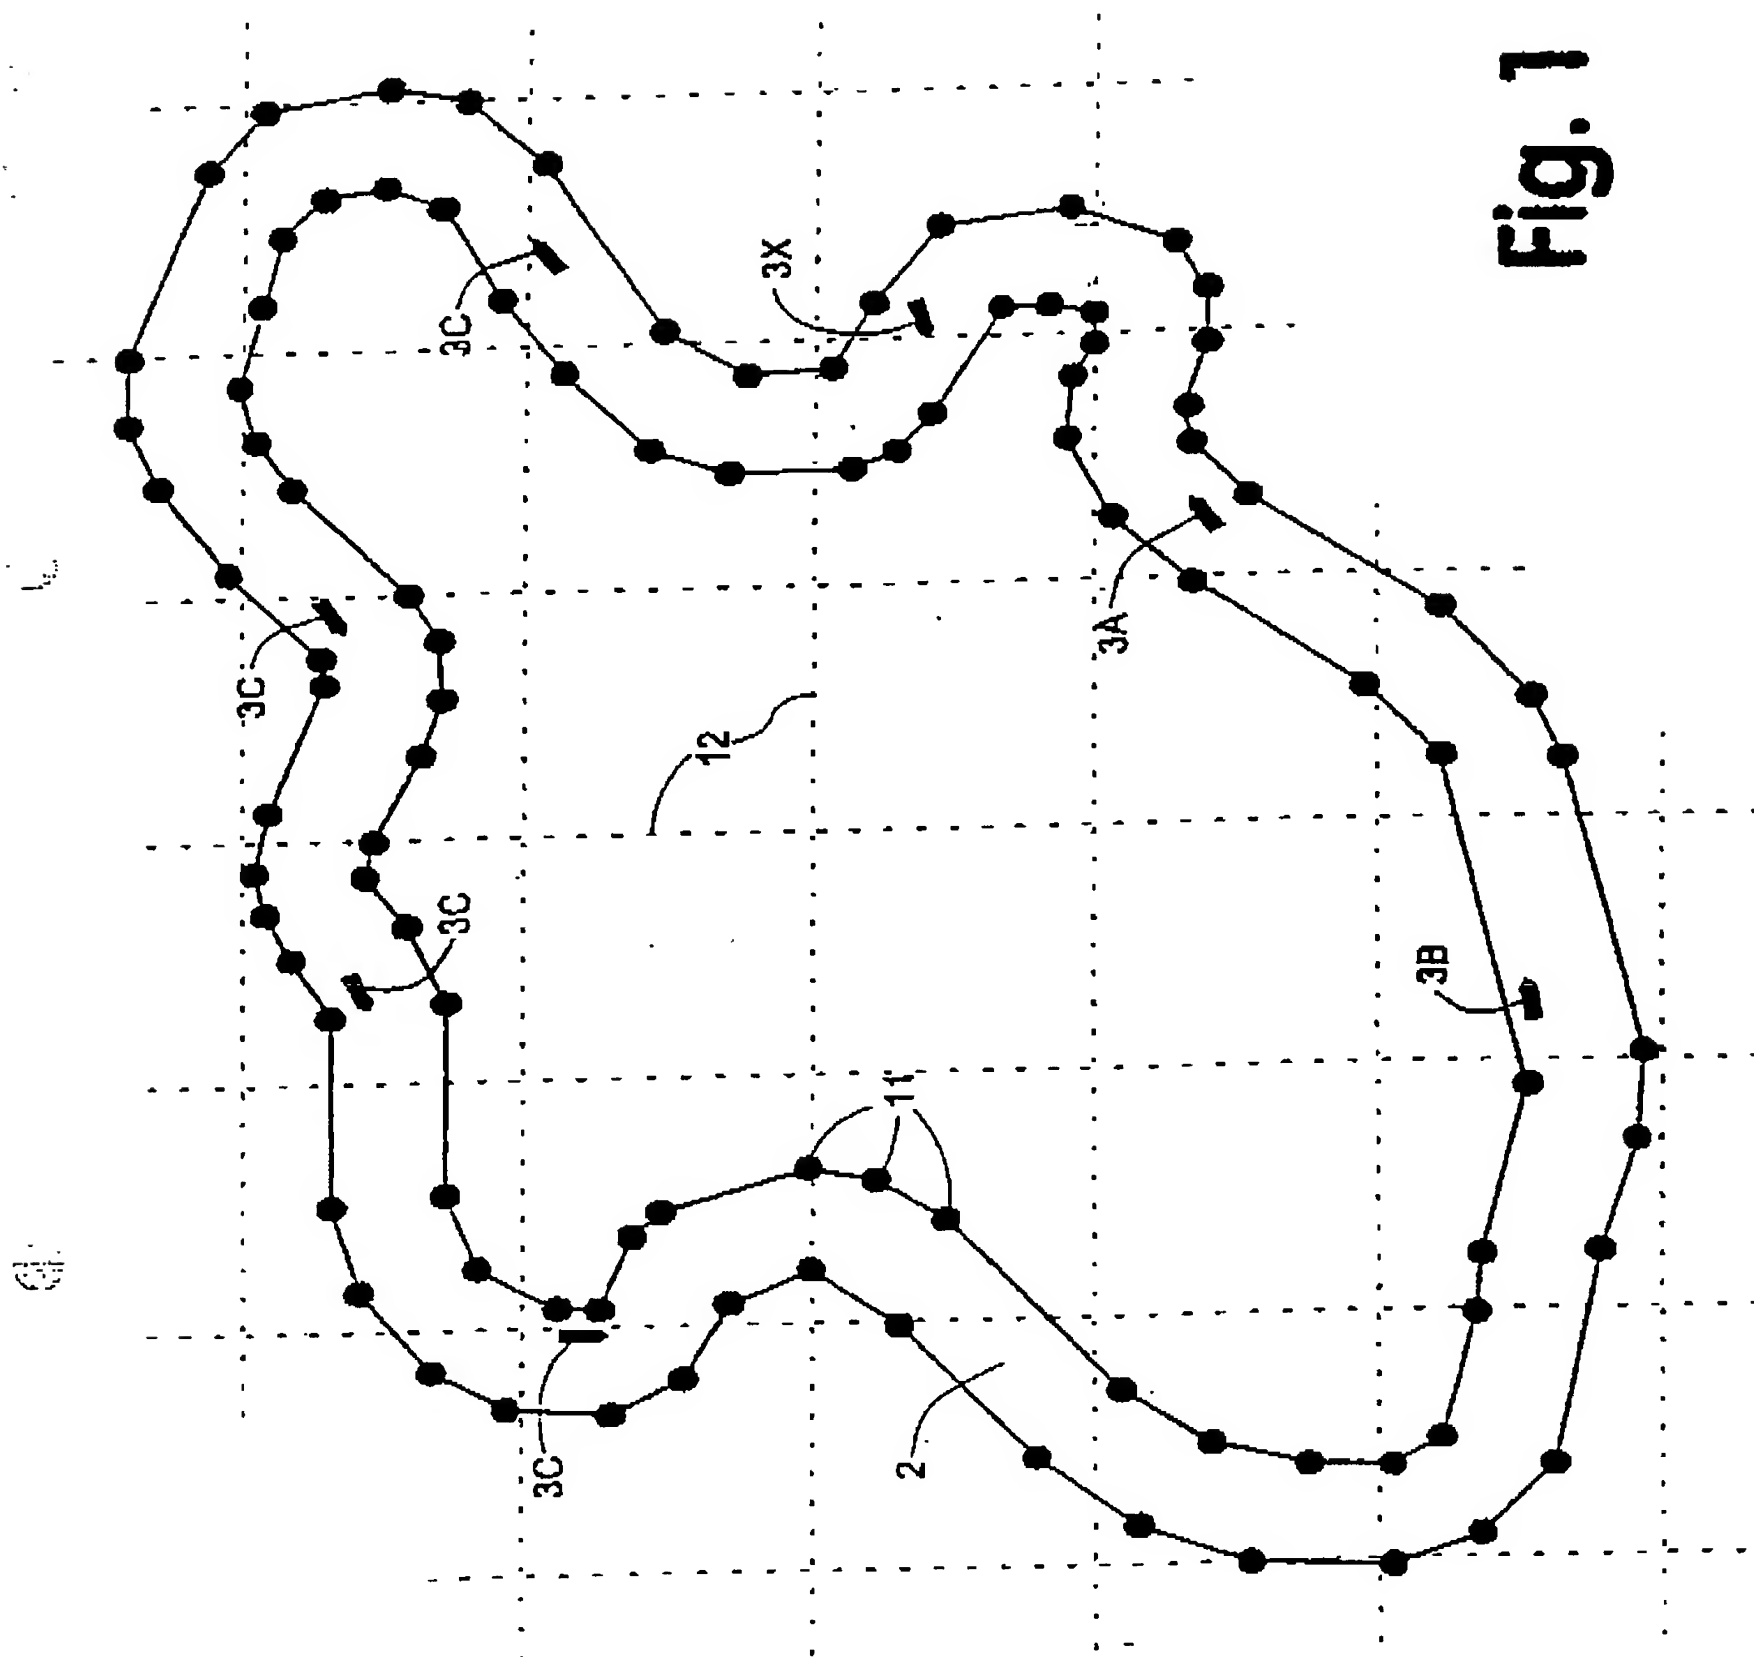

**Fig. 2A**

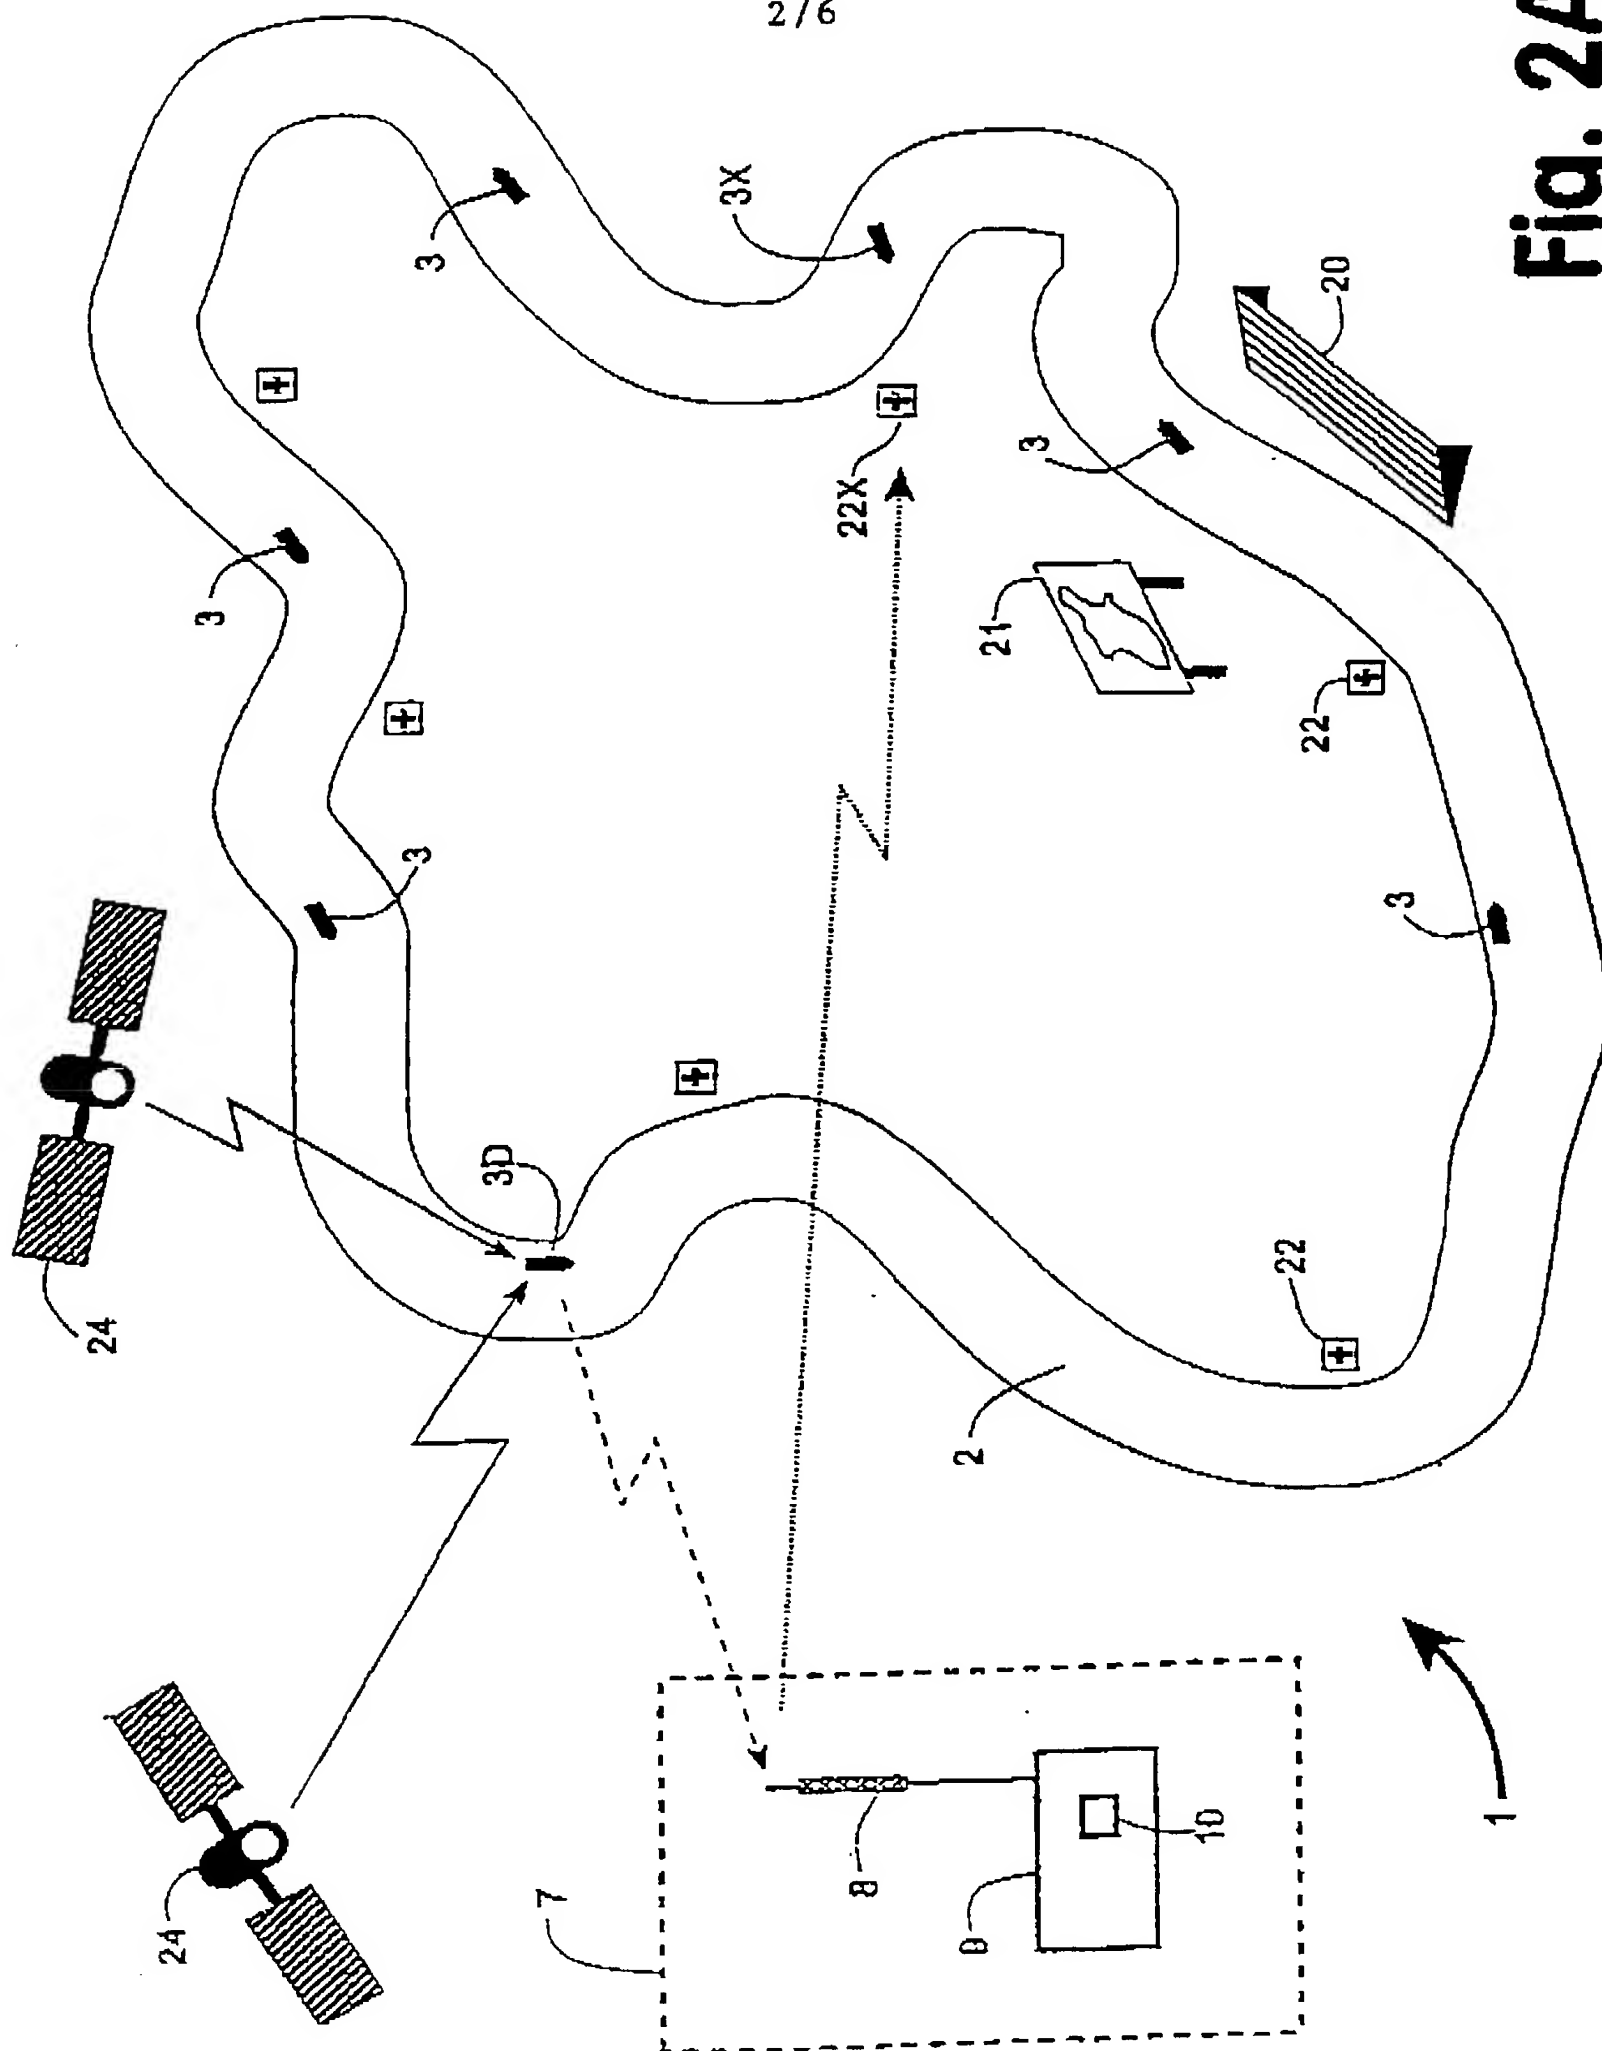


WO 01/33530

PCT/EP00/10518

OBLON ET AL (703) 413-3000  
DOCKET # 221414US SHEET 3 OF 6

3/6

Fig. 2B

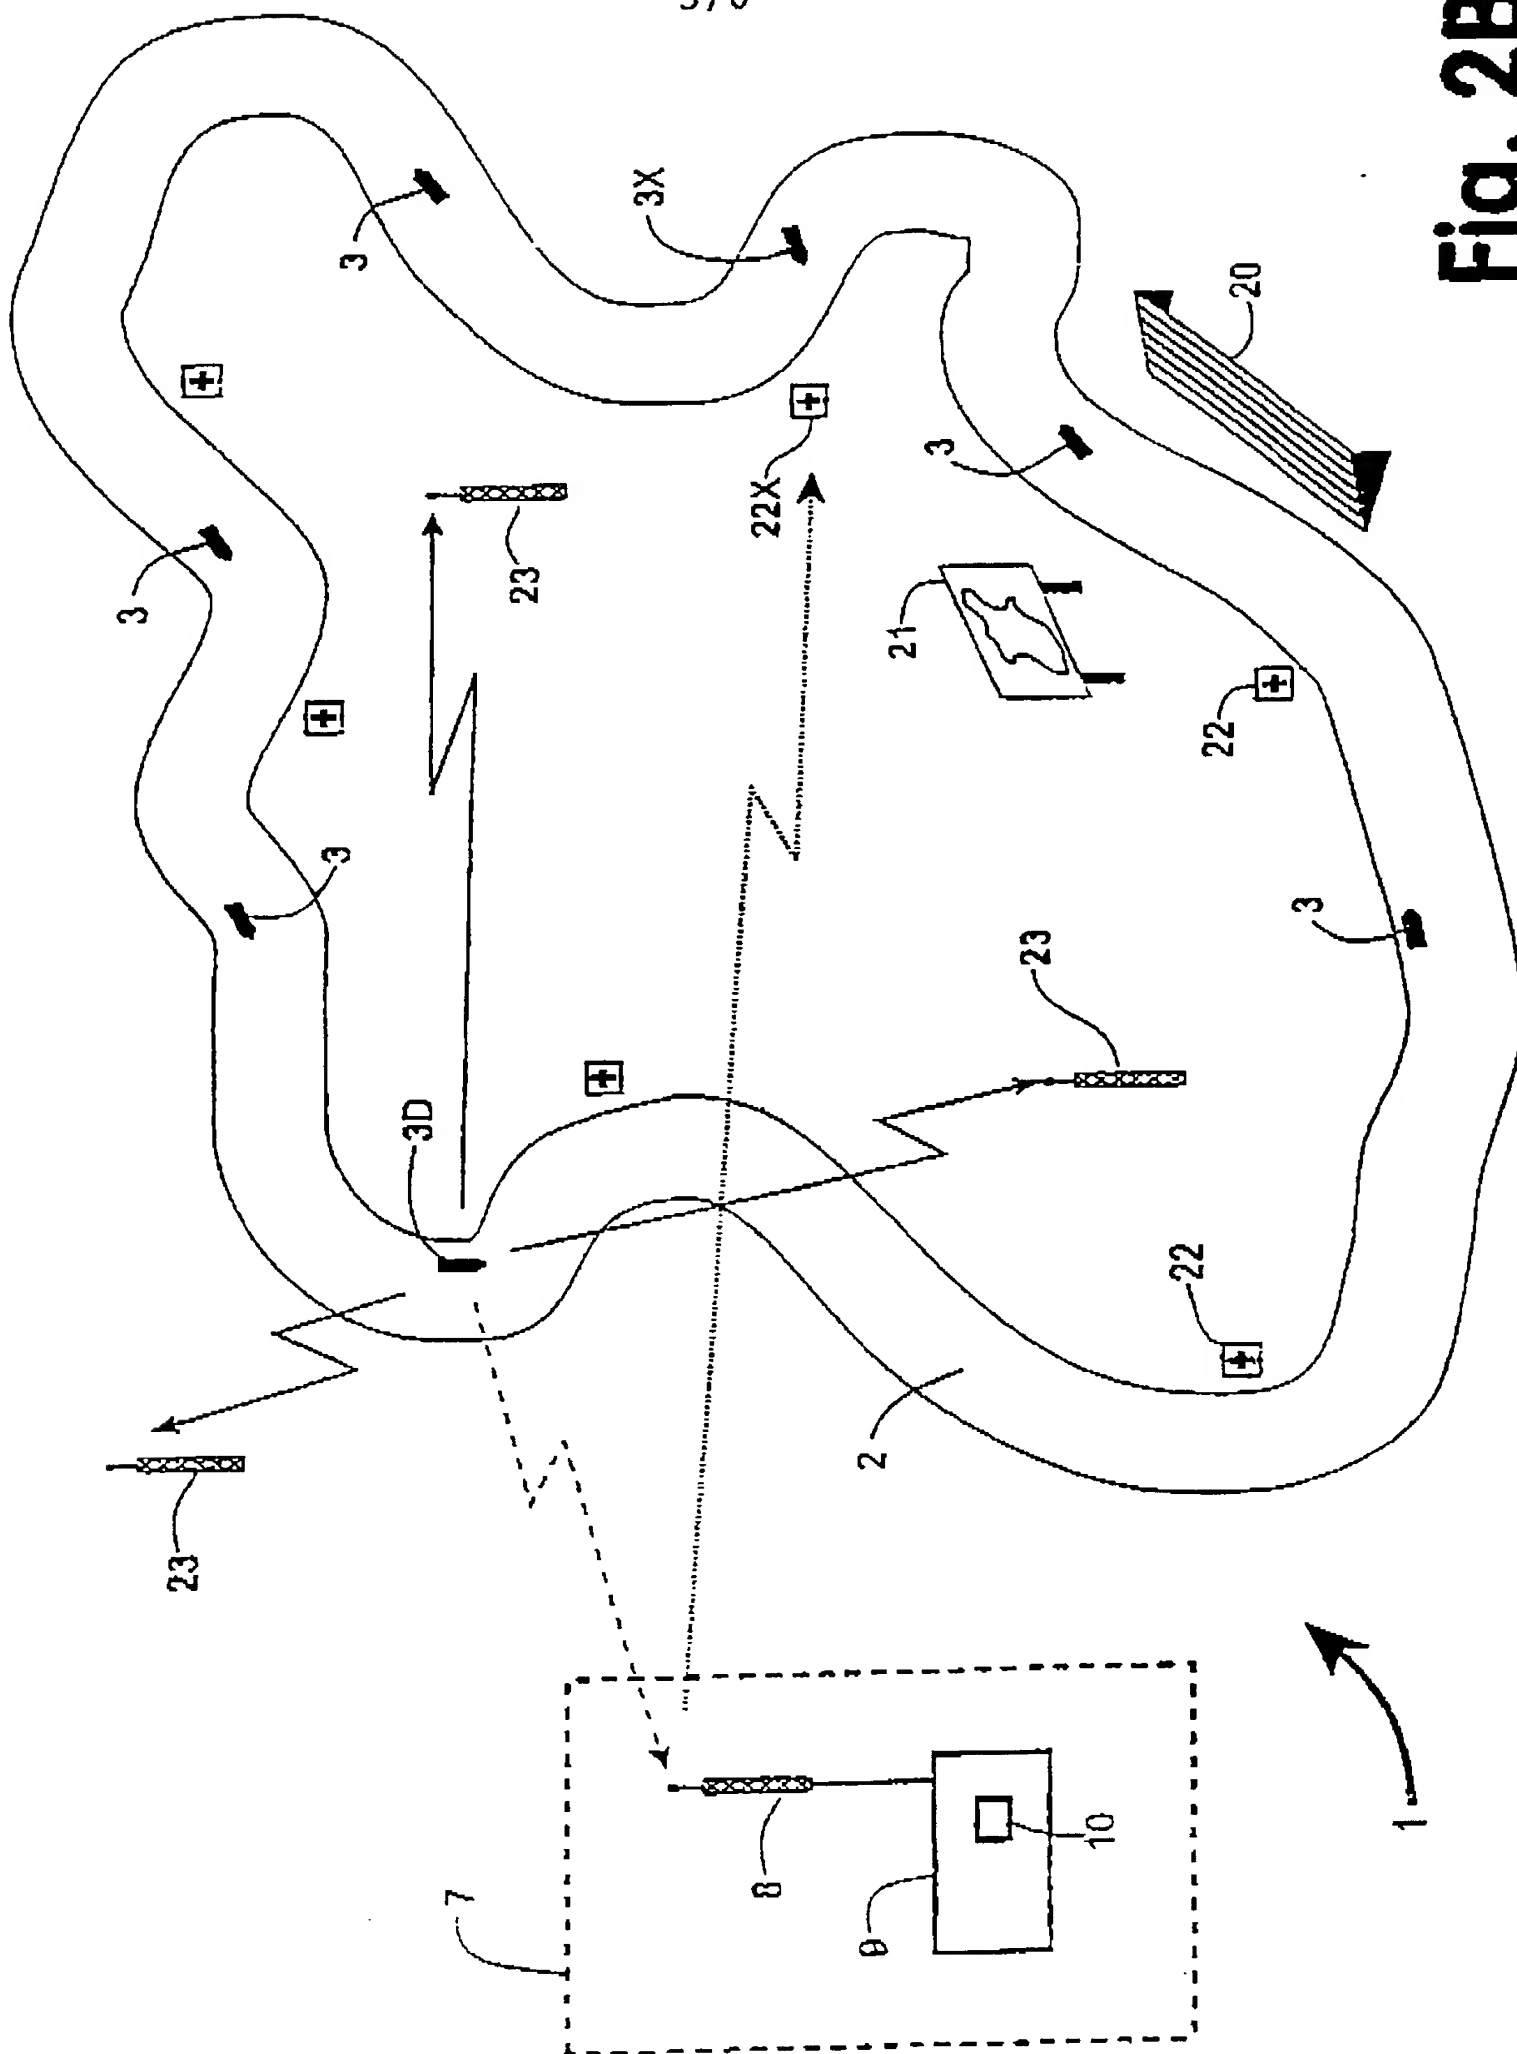

Received at: 10:09AM, 3/26/2002

26. MAR. 2002 15:49

WBETAL +498954301/00

NR. 1426 S. 31/49


PCT/EP00/10518

WO 01/33530

OBLON ET AL (703) 413-3000  
DOCKET # 221414 US SHEET 4 OF 6

Fig. 3A

4/6

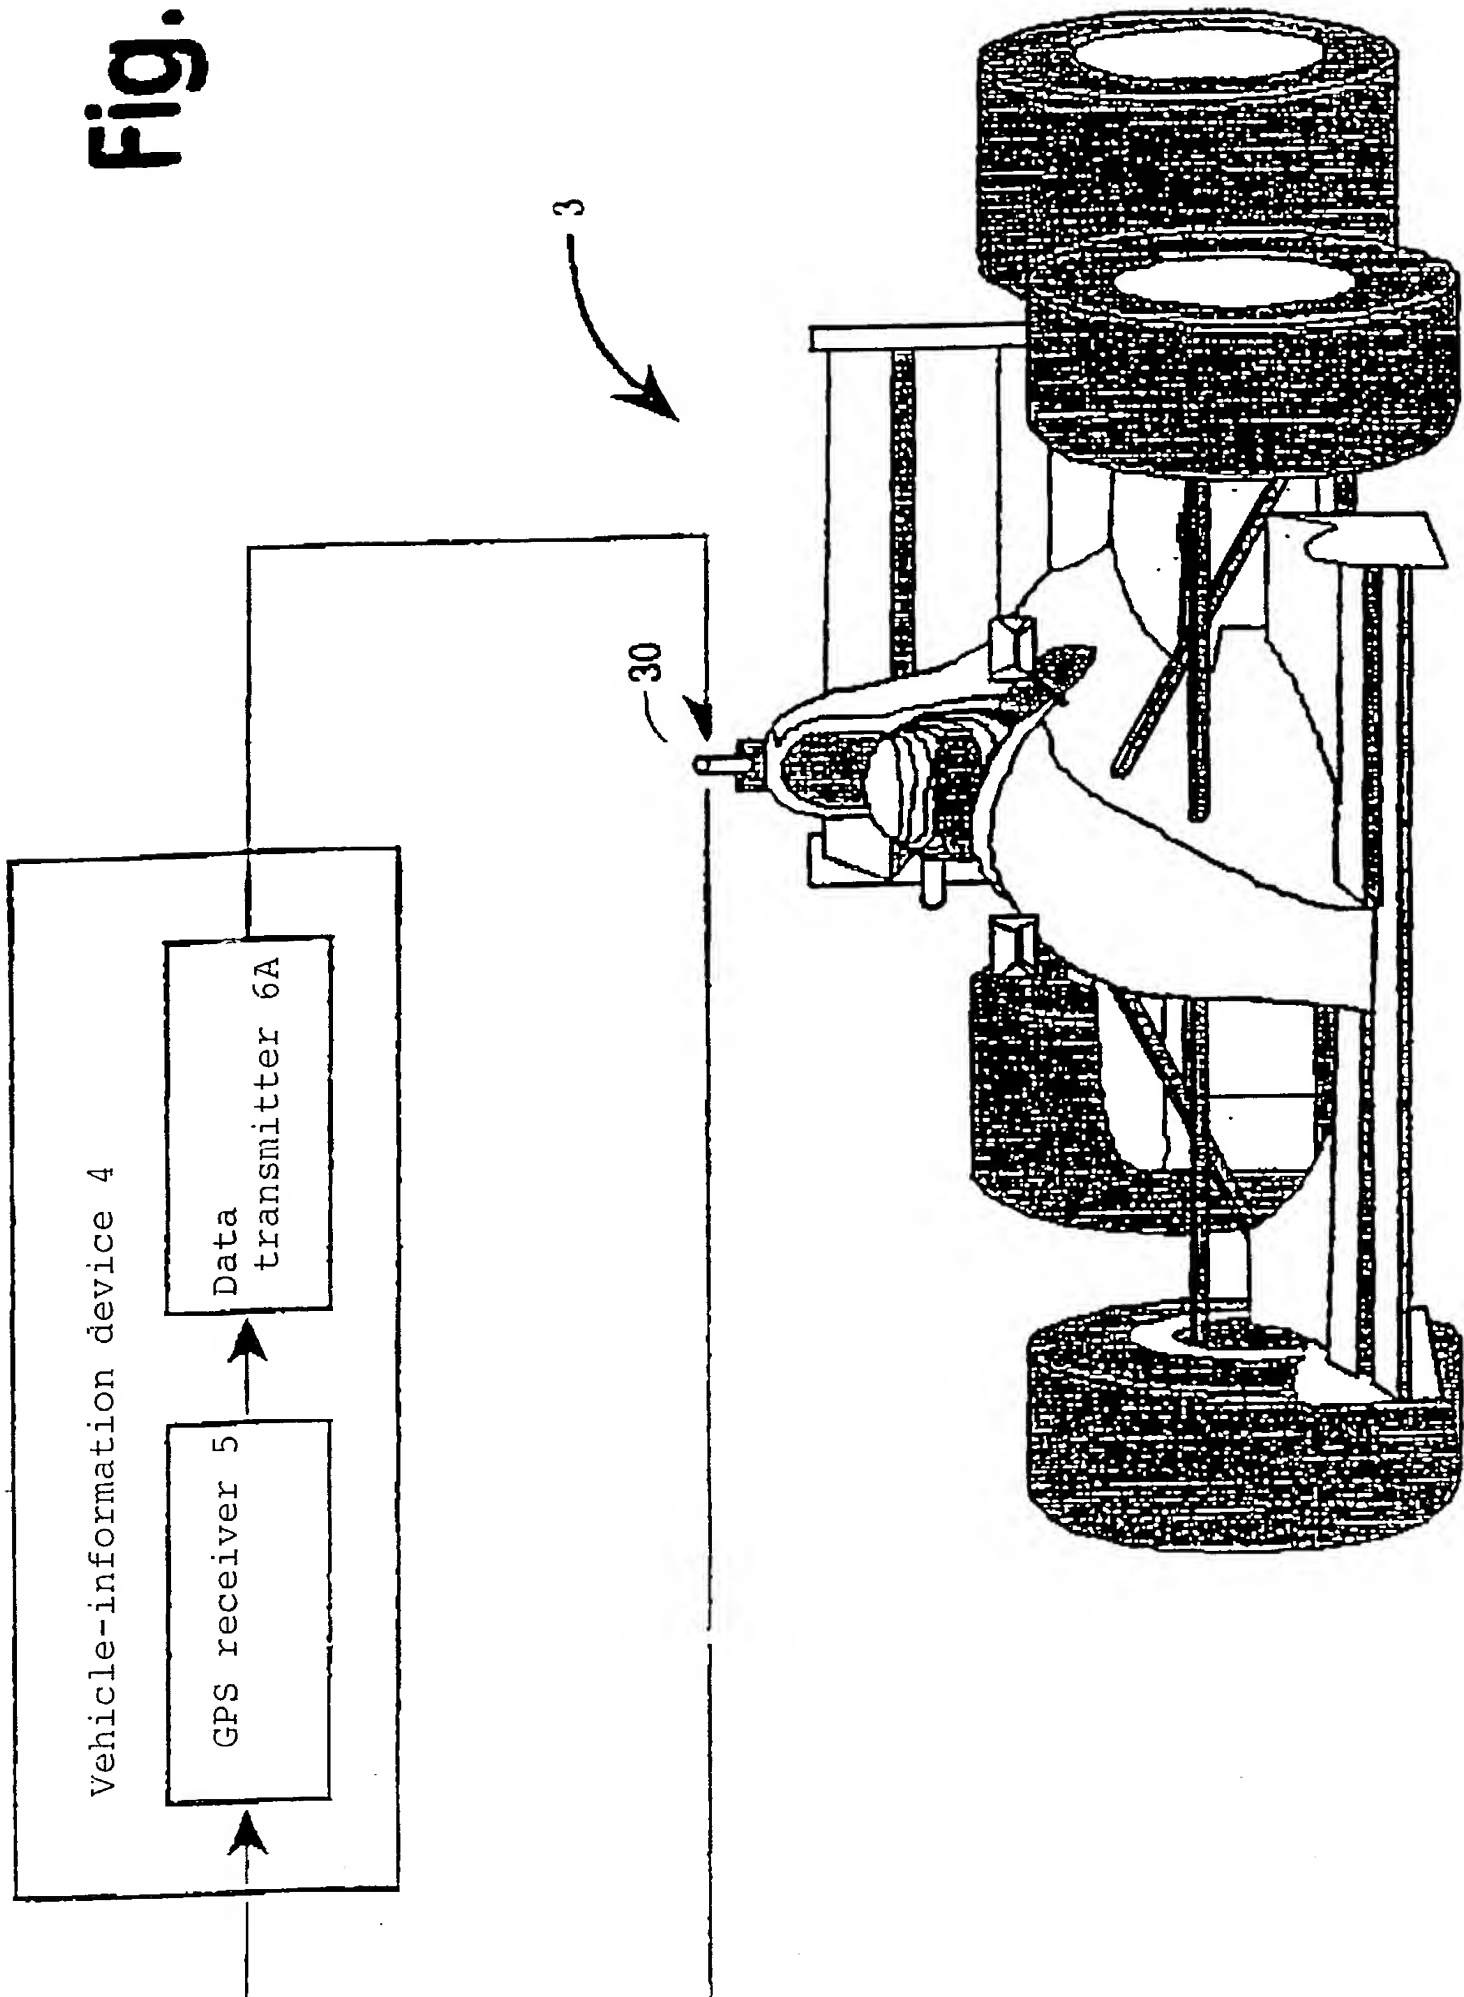

WO 01/33530


OBLON ET AL (703) 413-3000

DOCKET # 221414 US SHEET 5 OF 6

PCT/EP00/10518

Fig. 3B

5/6

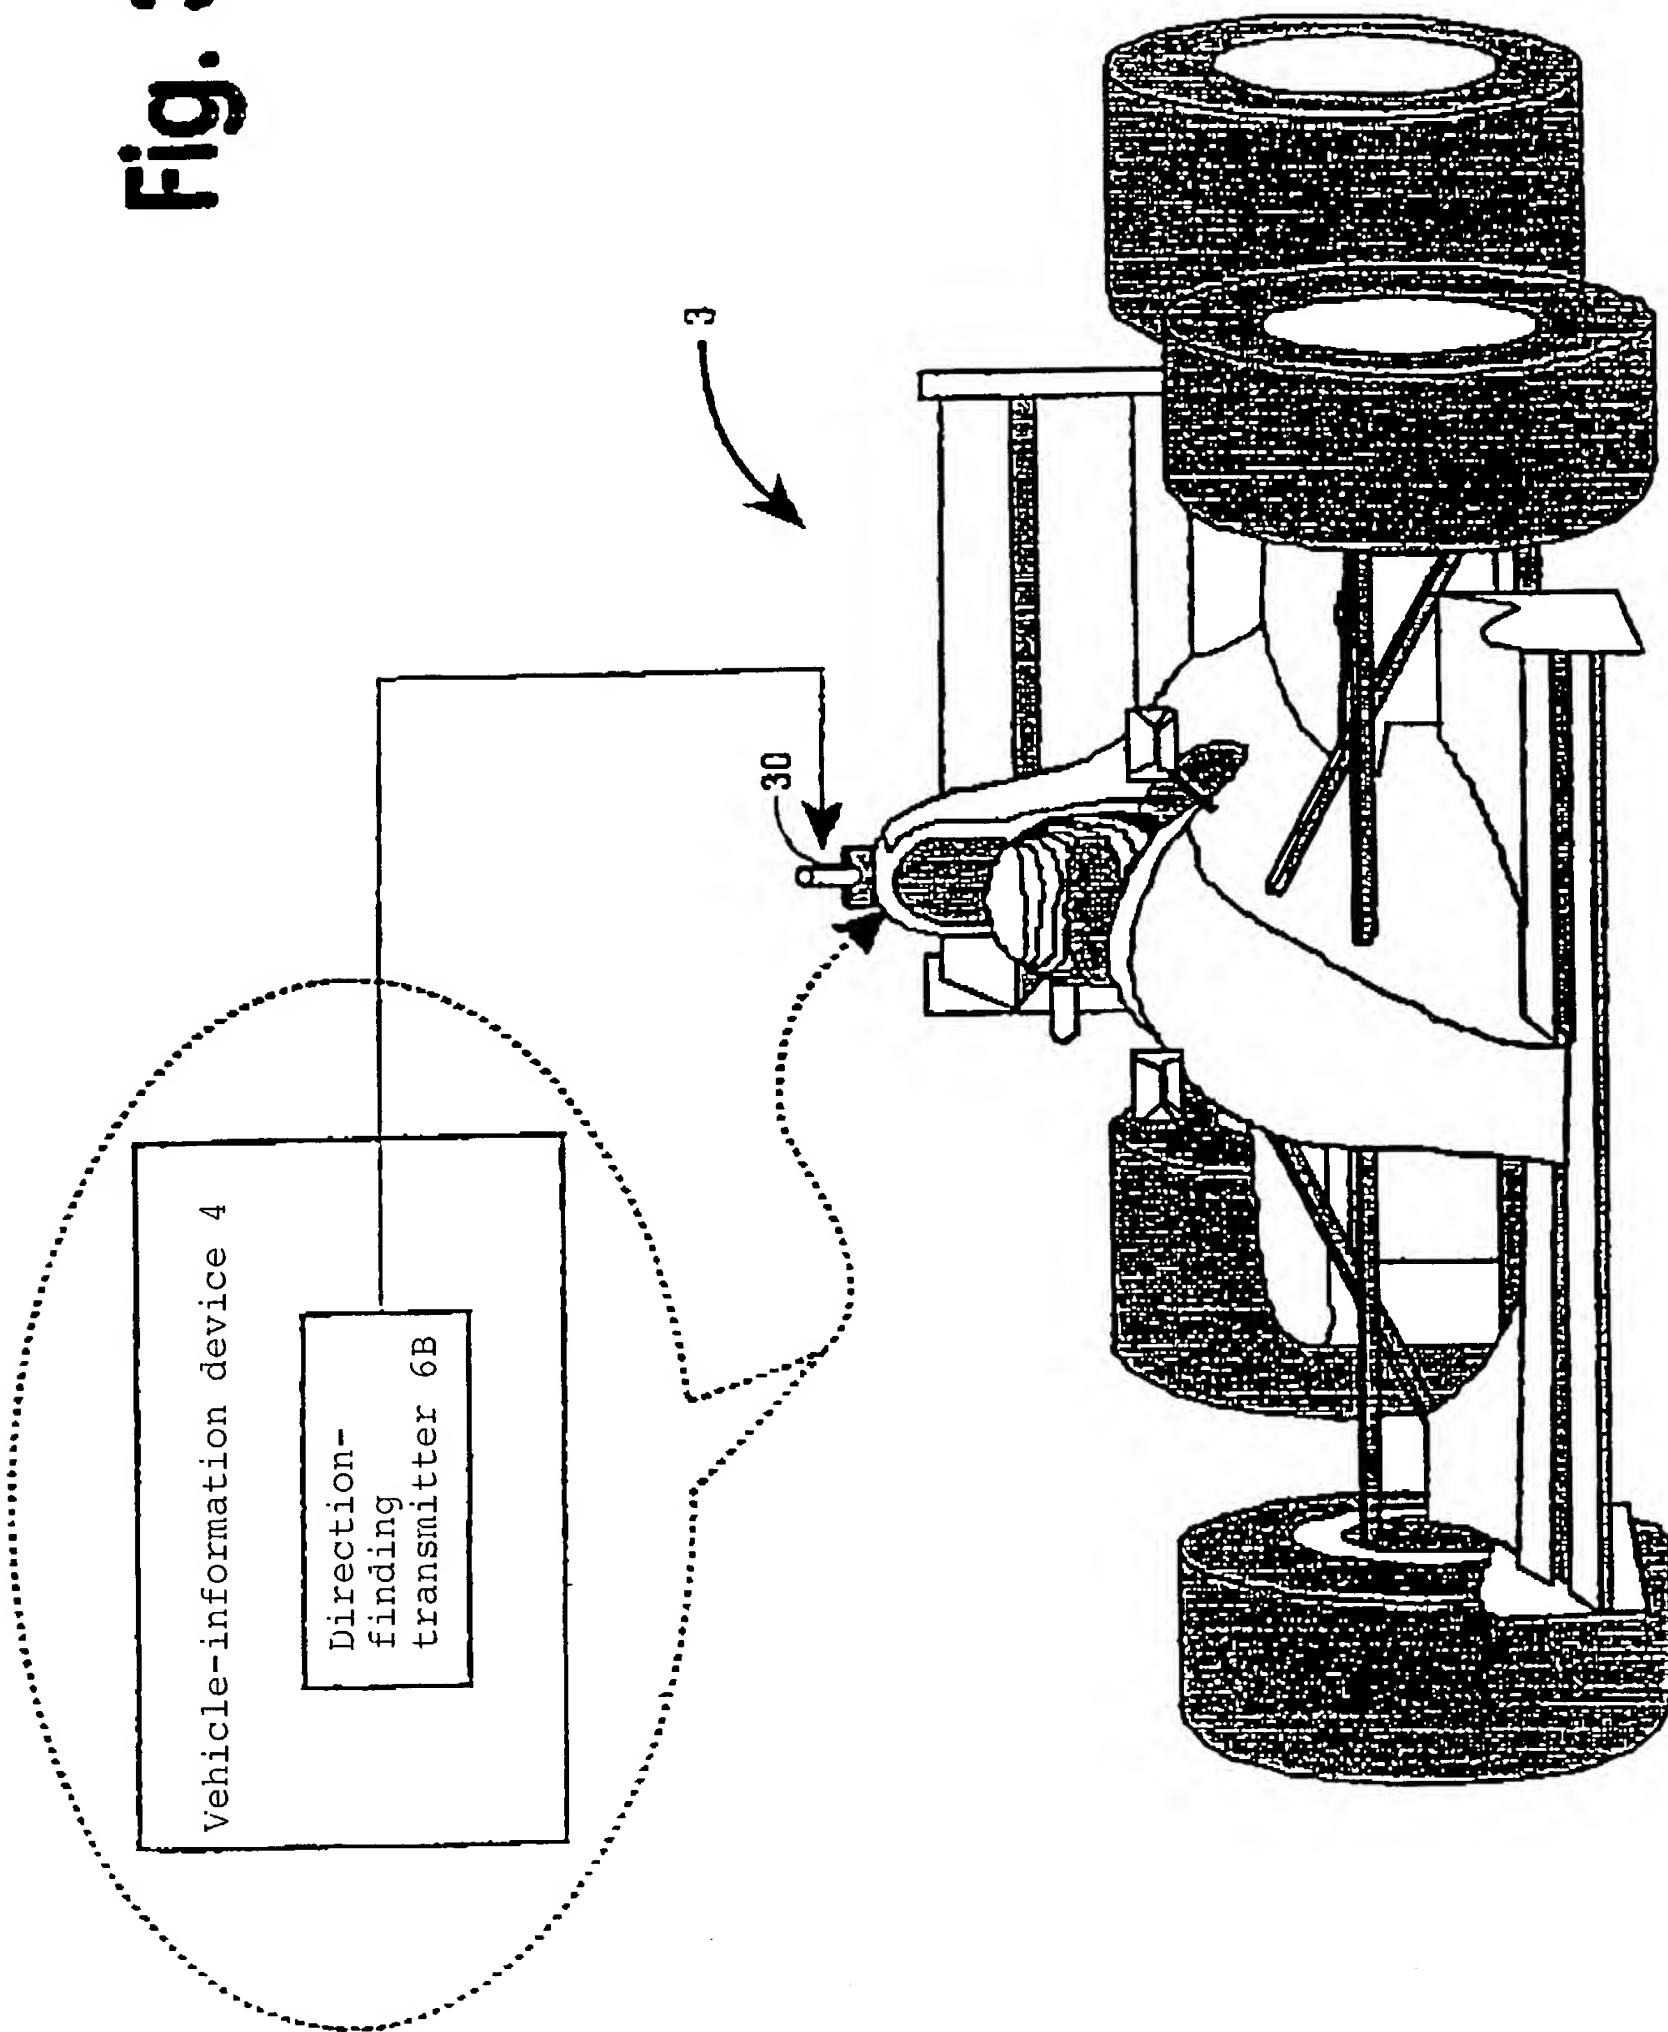


WO 01/33530

OBLON ET AL (703) 413-3000

DOCKET #221414 US SHEET 6 OF 6

PCT/EP00/10518

Fig. 3C

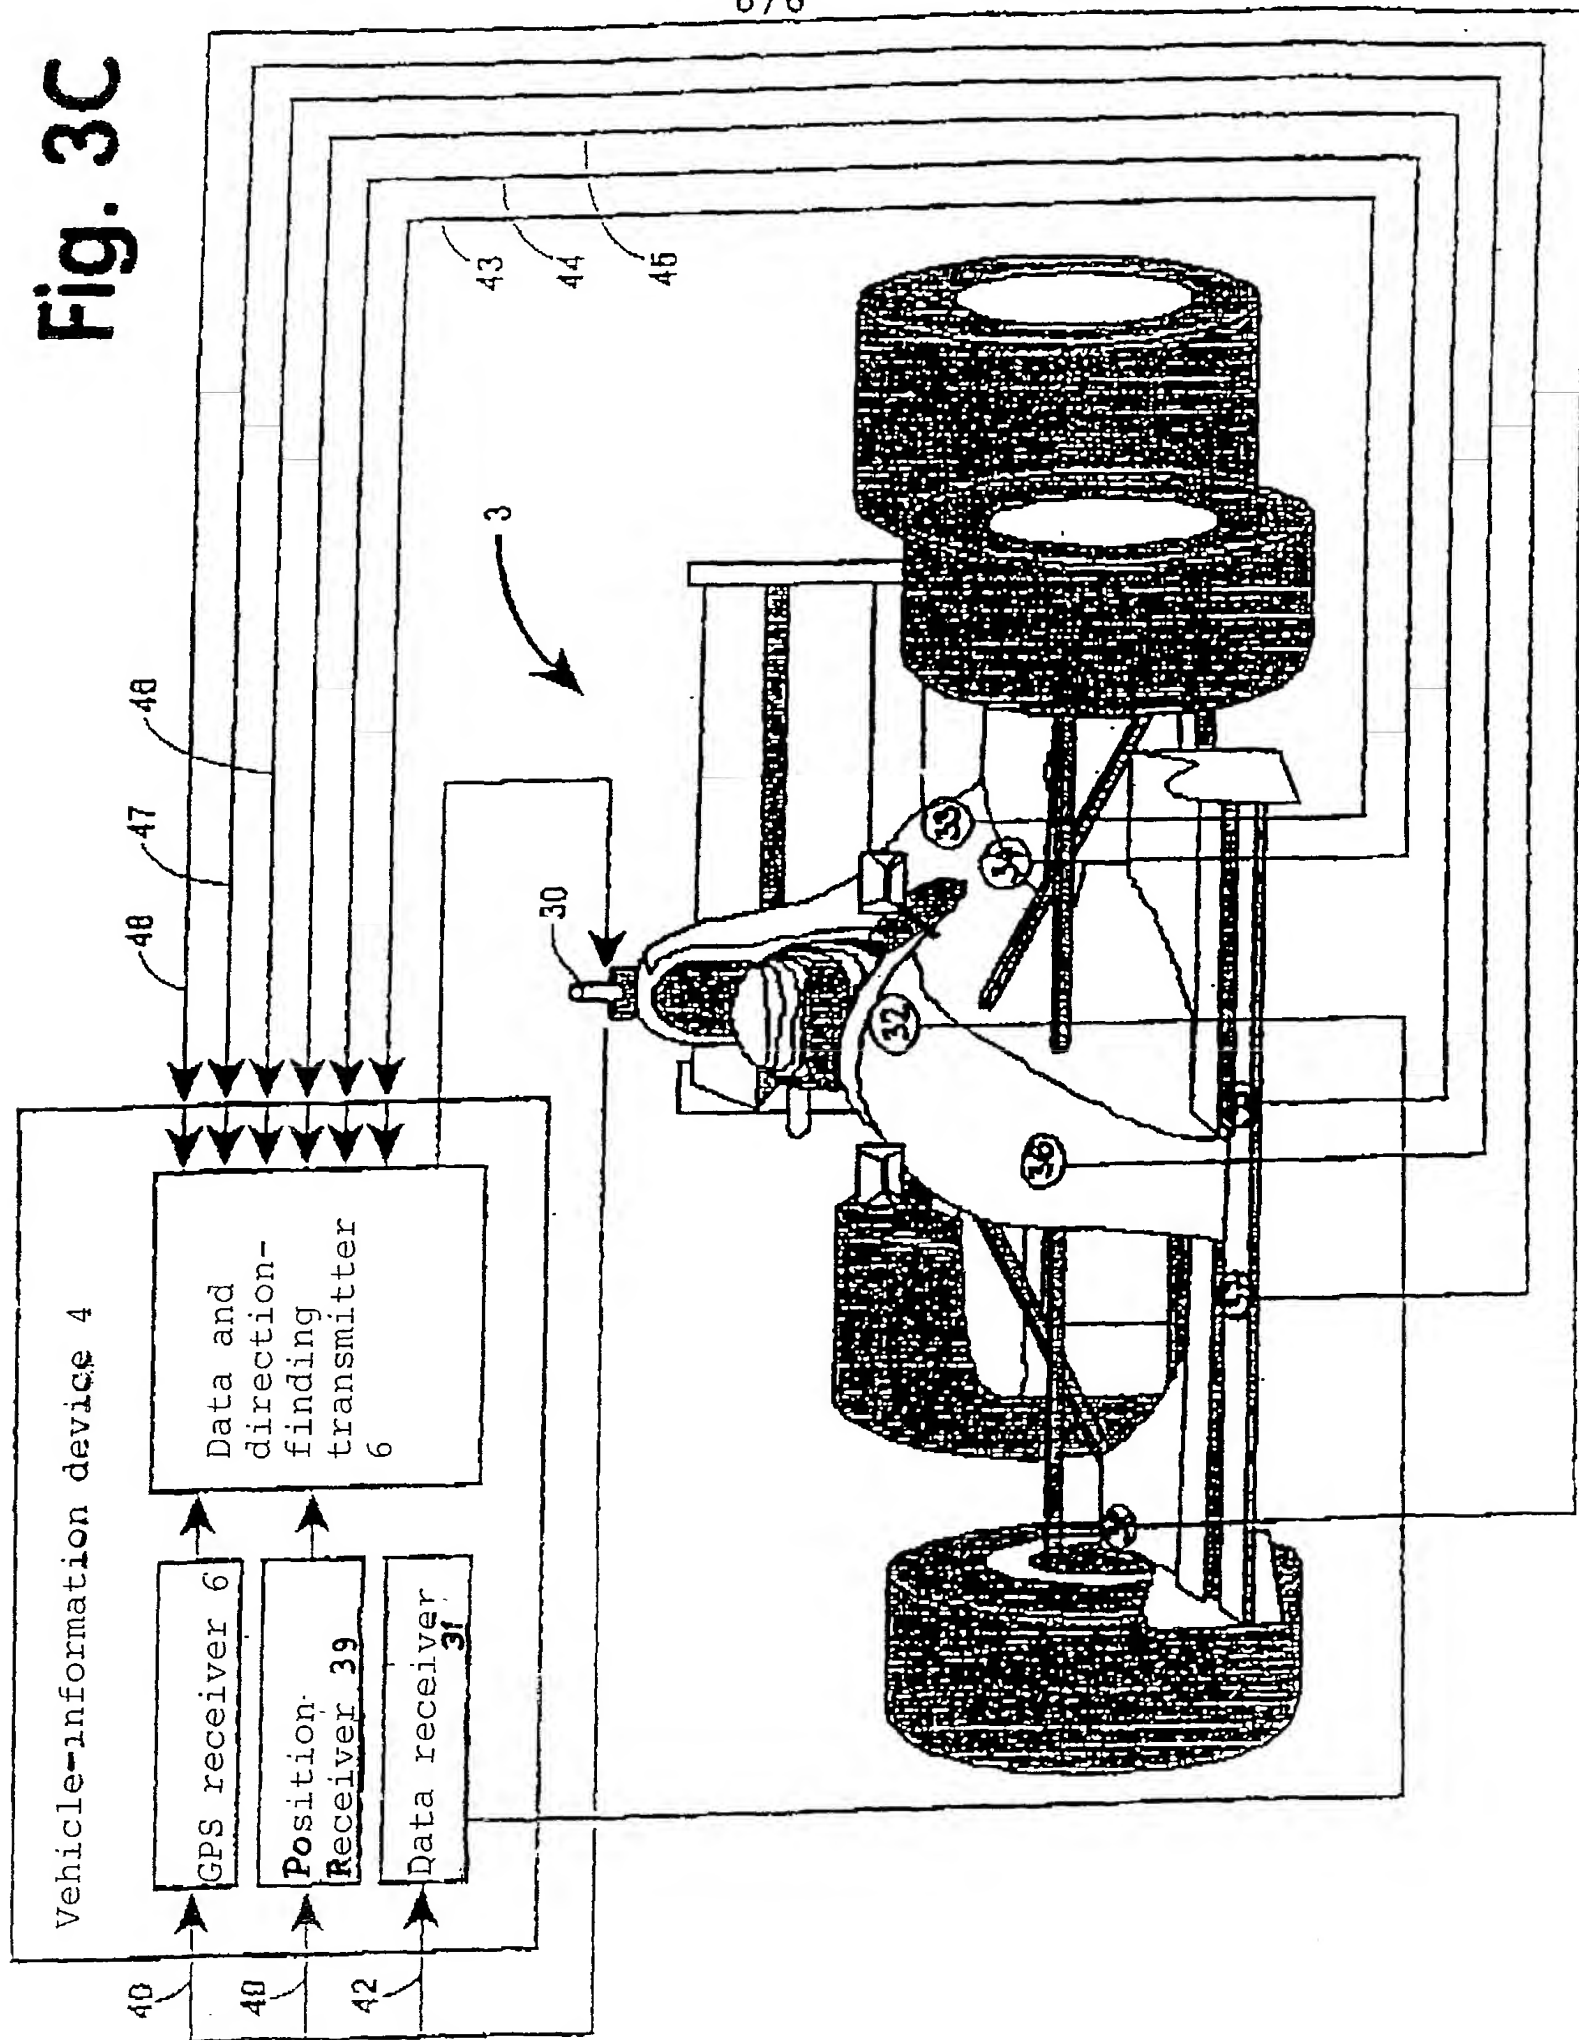



22 Apr. 2002 15:23

WBETAL +49 89 54301 700

Nr. 3042 S. 2/4

Docket No. 221414US2PCT

# Declaration and Power of Attorney for Patent Application

## Erklärung für Patentanmeldungen mit Vollmacht

### German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

daß mein Wohnsitz, meine Postanschrift und meine Staatsangehörigkeit den im nachstehenden nach meinem Namen aufgeführten Angaben entsprechen, daß ich nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent für die Erfindung mit folgendem Titel beantragt wird:

Deren Beschreibung:

- ☐ Ist beigefügt
- ☐ wurde angemeldet am \_\_\_\_\_

unter der US-Anmeldenummer oder unter der Internationalen Anmeldenummer im Rahmen des Vertrags über die Zusammenarbeit auf dem Gebiet des Patentwesens (PCT)

\_\_\_\_\_ und am \_\_\_\_\_  
\_\_\_\_\_ Abgeändert (falls zutreffend).

Ich bestätige hiermit, daß ich den Inhalt der oben angegebenen Patentanmeldung, einschließlich der Ansprüche, die eventuell durch einen oben erwähnten Zusatzantrag abgeändert wurde, durchgesehen und verstanden habe.

Ich erkenne meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Titel 37, Code of Federal Regulations, § 1.56 von Belang sind.

As a below named inventor, I hereby declare that:

My residence, mailing address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

POSITIONING SYSTEM FOR RACING CARS

the specification of which

- ☐ is attached hereto.
- ☒ was filed on October 25, 2000

as United States Application Number or PCT International Application Number

PCT/EP00/10518 and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

COPY

22 Apr. 2002 15:23

WBETAL +49 89 54301 700

Nr. 3042 S. 3/4

## German Language Declaration

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäß Title 35, US-Code, § 119(a)-(d), bzw. § 365(b) aller unten aufgeführten Auslandsanmeldungen für Patente oder Erfinderurkunden, oder § 365(a) aller PCT Internationalen Anmeldungen, welche wenigstens ein Land ausser den Vereinigten Staaten von Amerika benennen, und habe nachstehend durch ankreuzen sämtliche Auslandsanmeldungen für Patente bzw. Erfinderurkunden oder PCT. internationale Anmeldungen angegeben, deren Anmeldetag dem der Anmeldung, für welche Priorität beansprucht wird, vorangeht.

**Prior Foreign Application(s)**  
(Frühere ausländische Anmeldungen)

199 52 297.9

(Number)  
(Number)

## Germany

(Country)  
(Land)

**199 62 788.6**

(Number)  
(Nummer)

## Germany

(Country)  
(Land)

Ich beanspruche hiermit Prioritätsvorteile unter Title 35, US-Code, § 119(e) aller US-Hilfsanmeldungen wie unten aufgezählt.

(Application No.)  
(Aktenzeichen)

(Filing Date)  
{Anmeldetag}

Ich beanspruche hiermit die mir unter Title 35, US-Code, § 120 zustehenden Vorteile aller unten aufgeführten US-Patentanmeldungen bzw. § 365(c) aller PCT internationalen Anmeldungen, welche die Vereinigten Staaten von Amerika benennen, und erkenne, insofern der Gegenstand eines jeden früheren Anspruchs dieser Patentanmeldung nicht in einer US-Patentanmeldung, bzw. PCT Internationalen Anmeldung in in einer gemäß dem ersten Absatz von Title 35, US-Code, § 112 vorgeschriebenen Art und Weise offenbart wurde, meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Title 37, Code of Federal Regulations, § 1.56 von Belang sind und die im Zeitraum zwischen dem Anmeldetag der früheren Patentanmeldung und dem nationalen oder im Rahmen des Vertrags über die Zusammenarbeit auf dem Gebiet des Patentwesens (PCT) gültigen internationalen Anmeldetags bekannt geworden sind.

**PCT/EP00/10518**

(Application No.)  
(Aktenzeichen)

**October 25, 2000**

(Filing Date)  
(Anmeldetag)

(Application No.)  
(Aktenzeichen)

(Filing Date)  
(Anmeldetag)

Ich erkläre hiermit, daß alle in der vorliegenden Erklärung von mir gemachten Angaben nach bestem Wissen und Gewissen der Wahrheit entsprechen, und ferner daß ich diese eidesstattliche Erklärung in Kenntnis dessen ablege, daß wissentlich und vorsätzlich falsche Angaben oder dergleichen gemäß § 1001, Title 18 des US-Code strafbar sind und mit Geldstrafe und/oder Gefängnis bestraft werden können und daß derartige wissentlich und vorsätzlich falsche Angaben die Rechtswirksamkeit der vorliegenden Patentanmeldung oder eines aufgrund deren erteilten Patenten gefährden können.

I hereby claim foreign priority under Title 35, United States Code, § 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

**Priority Claimed**  
**Priorität**  
**beansprucht**

29 October 1999

(Day/Month/Year Filed)  
(Tag/Monat/Jahr der Anmeldung)

☒ Yes  
☐ Ja

**No**  
**Nein**

**23 December 1999**

(Day/Month/Year Filed)  
(Tag/Monat/Jahr der Anmeldung)

☒ Yes  
☐ Ja

☐ No  
Nein

**I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below.**

(Application No.)  
(Aktenzeichen)

(Filing Date)  
(Anmeldetag)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Status: Patented, Pending, Abandoned)  
(Status: patentiert, schwebend, aufgegeben)

(Status: Patented, Pending, Abandoned)  
(Status: patentiert, schwebend, aufgegeben)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

COPY

1. The first step in the process is to identify the problem or issue that needs to be addressed. This involves gathering information and understanding the context of the problem.

22-Apr-2002 15:23

WBETAL +49 89 54301 700

Nr. 3042      S. 4/4

**VERTRETUNGSVOLLMACHT:** Als benannter Erfinder beauftrage ich hiermit den (die) nachstehend aufgeführten Patentanwalt (Patentanwälte) und/oder Vertreter mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Angelegenheiten vor dem US-Patent- und Markenamt: (Name(n) und Registrationsnummer(n) auflisten)

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: (list name and registration number)



**022850**

**Postanschrift:**

**Send Correspondence to:**



**022850**

**Telefonische Auskünfte: (Name und Telefonnummer)**

**Direct Telephone calls to: (name and telephone number)**

**(703) 413-3000**

Vor- und Zuname des einzigen oder ersten Erfinders	Full name of sole or first inventor Robert ASAM
Unterschrift des Erfinders	Inventor's signature
Datum	Date
Wohnsitz	Residence Am Soeldnemoos 17, 85399 Hallbergmoos, Germany
Staatsangehörigkeit	Citizenship Germany
Postanschrift	Mailing Address Same as above

COPY